



Your Vision,  
Our Expertise

PRODUCT  
CATALOUGE  
2025



Backed with huge industry experience and market understanding, we are involved in manufacturing a wide variety of Brass A1 A2 Cable Glands for our valued patrons.



We specialize in manufacturing safe, leak proof, flameproof and explosion proof glands to avoid all mishaps & prevent any hazards to the health & property.



CW 2 Part and 3 part and 4 part



MS Copper Bonded



It is designed using optimum quality brass material and using modern technology to ensure its flawless performance.



Our organization is well known in the market for providing a broad assortment of Brass Cable Gland to our clients. These products are manufactured using quality tested components.



nickel-plated brass, from -40 °C to +100 °C, do not remove or move the gasket; tighten on a flat and smooth surface.



Brass, Double Compressor, Polished.

# Copper And Aluminium Lug



Cable Lug, Copper and Aluminium, Welding, Conduct Electricity, Transmission of Electrical Signals, Power



Lugs and Joints, Bimetallic Lugs and Connectors



Copper, 5 Inch



Compression Type, Aluminum Terminal ends, for crimping to XLPE Conductors



Copper, High Temperature Resistance, Round



Silver, copper, silver, Ring Terminal




ILSCO Mechanical Lug, One Conductor, Mechanical connection, Dual Rated, Aluminum material, Tin plated connector, 1 mounting hole(s), mounting bolt/stud size 1/4 in, UL 486A/B Listed, UL 467 Listed, C22.2 No.



Eastren Enterprise manufactures Best quality crocodial terminal available in high quality, made from brass. Buyers from all india can contact


# Brass Neutral Link



Anchors drop in Anchors  
Fasteners Brass Electrical  
Accessories Brass Nuts Brass  
Pipe Fittings Plumbing Fittings



We offer a wide range of Brass  
HC Neutral Link in various  
ranges & specifications. Our  
products are manufactured  
using high grade materials.



NEUTRAL LINK / NEUTRAL  
LINK BAR / SCREW BRASS BAR  
(60A) 6WAY, 8WAY, 10WAY,  
12WAY, 16WAY, 20WAY, 22WAY



A simple easy to use system of  
DIN 3 rail mounting ground and  
neutral bars for panel or box  
assemblies, colour coded in  
green (ground) and blue  
(neutral) to ease identification



A simple easy to use system of  
DIN 3 rail mounting ground and  
neutral bars for panel or box  
assemblies, colour coded in  
green (ground) and blue (neutral)  
to ease identification.



12 Hole Neutral Link  
500V 110A  
25mm Max Cable Size



We are leading manufacturer  
and supplier of brass 6way  
neutral links, 12ways neutral bar,  
18 ways neutral bar, 24 ways  
neutral bars, 30 way neutral links,  
42 way neutral links, 48 ways  
neutral links, 54 ways neutral links,  
60 ways neutral links, 72 way neutral  
links, 84 ways neutral links, 96 ways  
neutral link, 108 ways neutral link



250-amp stud-only earth/neutral  
bar - 6xM10 studs with feet  
The Australian-manufactured  
stud-only earth/neutral bar  
comes with feet.



Supported by a team of highly skilled professionals, we are involved in offering a wide array of Brass Electrical Part that is intricately designed using premium grade raw material and avant-garde technologies in complete tandem with universally accepted norms of quality.



The products we offer are used in varied electric apparatus for enhancing their performance and longevity.



We are engaged in offering a wide and exotic assortment of Brass Temperature Sensor Parts for high temperature sensors. Brass Temperature Sensor Parts that we offer are manufactured following industry norms and standards.



Brass Free Cutting Grade I, Grade II, Grade III Lead Free, DZR Brass, Copper C101/CW004A Beryllium Copper, Chromium Copper, Steel Aluminium, Bronze NES833, CA 104, PB1, Pb102, Any Other Equivalent Grades



- Free cutting brass IS 319-1 type
- High grade free cutting brass
- Free cutting brass as per BS 249 type.
- Any brass material as per customer Composition & Specification.



**Size :** 6mm 2 , 10mm 2 , 16mm 2 , 25mm 2 , 35mm 2 , 50mm 2 , 70mm 2 , 95/100mm2 , 120mm 2 , 185 mm 2 , 240mm 2 , 300mm 2 , 400mm 2 .

**Material:** Brass CDA 360, Copper, Aluminium



**Material :** Brass  
**Surface :** Polished  
**Packaging Size :** As per customer need  
**Packaging Type :** Packed in Good Quality Box  
**Size :** Multisize  
**Features :** Precisely engineered, Durability, Accurate dimension



**Thread Size :** 2 mm - 32 mm  
**Threads :** ISO Metric, BSW, BA, BSF, UNC, UNF UNEF  
**Finish :** Brass natural, Electro-Tinned, Nickel  
**Material :** Brass





## Square Tape Clamp

Conductor Size (MM)


25 x 3  
25 x 4  
25 x 6  
50 x 6



## DC Tape Clip

Conductor Size (MM)

25 x 3  
25 x 6  
40 x 6  
50 x 6



## Rod To Cable Clamp ( U Bolt )

| Rod Size | Conductor  |
|----------|------------|
| Inch     | MM         |
| 5/8"     | 16         |
| 3/4"     | 20         |
| 1"       | 16         |
| 5/8"     | 20         |
|          | Size (Mm2) |
|          | 16 - 95    |
|          | 16 - 70    |
|          | 70 - 185   |
|          | 70 - 150   |



## Oblong Test Clamp

Conductor Size (MM)

25 x 3  
40 x 6  
50 x 6



## Tape Clip

Conductor Size (MM)

20 x 3  
25 x 3  
50 x 6



## Rod To Cable Lug Clamp

| Rod Size |      |
|----------|------|
| Inch     | MM   |
| 3/8"     | 9.5  |
| 5/8"     | 16.0 |
| 3/4"     | 20.0 |



## Coupler

Thread Size : 5/8" & 3/4"  
Length (MM) : 50, 60 & 70



## Male Bush

Size : 3/4" - 2"  
(20MM - 50MM)



## Clamp ( A Type )

Suitable For Rod  
Dia. 12MM



**Rod To Tape Clamp ( B Type )**

| Rod Size (Inch) | Conductor Size (MM) |
|-----------------|---------------------|
| 5/8"            | 26 x 12             |
| 5/8"            | 40 x 12             |
| 5/8"            | 51 x 12             |



**Road To Cable Clamp (C Type)**

| Size (Inch) | MM  | Conductor Size (Mm2) |
|-------------|-----|----------------------|
| 3/8"        | 9.5 | 35                   |
| 5/8"        | 16  | 50                   |
| 5/8"        | 16  | 70                   |
| 3/4"        | 20  | 95                   |



**Arrestor With Light Duty Base**

| Rod Dia: | Road Length: |
|----------|--------------|
| 10mm     | 12"          |
| 12mm     | 18"          |
| 15mm     | 24"          |
|          | 30"          |
|          | 36"          |



**Test Bond**

| Conductor Size (MM) |
|---------------------|
| 25 x 3              |
| 26 x 12             |



**Heavy Duty Arrestor Base**

| Conductor Size (MM) |
|---------------------|
| 40 x 6              |
| 50 x 6              |



**Heavy Duty Cable Saddle**

| Rod Size (Inch) | MM   |
|-----------------|------|
| 3/8"            | 9.5  |
| 5/8"            | 16.0 |
| 3/4"            | 20.0 |




**Ridge Saddle**



**Tee Clamp**



**Rod To Tape Coupling**

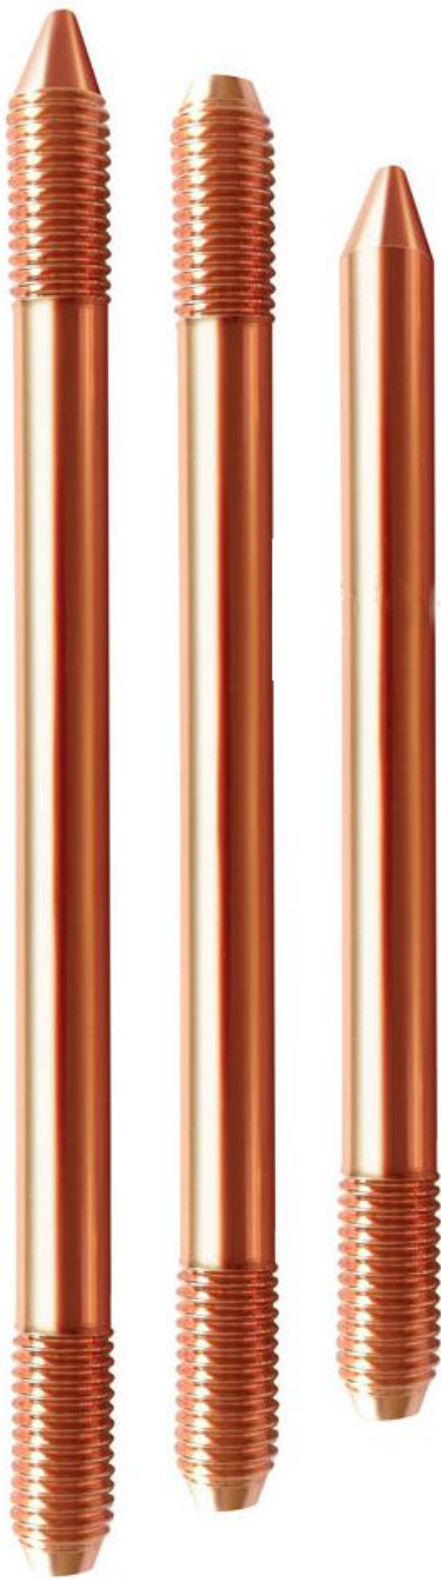

**Two Ends Thread**



**Two Ends Thread With  
One End Tip**



**One End Thread And One And  
Tipped**





### Office Australia :

- +61 431 444 959 / +61 480 128 584
- sales\_aus@apexmetalsworldwide.com
- 8 Bells avenue, Kalkallo,  
Victoria, 3064. Australia.

### Office UK :

- +44 07424505681
- info@apexmetalsworldwide.com
- 25c Ranelagh Road, Wembley,  
London, HA0 4TW

### Office Germany :

- +49 (0)159 06485285
- info@apexmetalsworldwide.com
- Lilistr 34, 63067, Offenbach  
am Main (Germany).

### Head Office India :

- +91 93744 37771 / +91 87587 49121
- info@apexmetalsworldwide.com
- apexmetals4634@gmail.com
- Plot No, 4634, GIDC Phase III,  
Jamnagar, Gujarat 361004.