



Your Vision,
Our Expertise

PRODUCT
CATALOGUE
2026

Cable Gland



Backed with huge industry experience and market understanding, we are involved in manufacturing a wide variety of Brass A1 A2 Cable Glands for our valued patrons.



We specialize in manufacturing safe, leak proof, flameproof and explosion proof glands to avoid all mishaps & prevent any hazards to the health & property.



CW 2 Part and 3 part and 4 part



MS Copper Bonded



It is designed using optimum quality brass material and using modern technology to ensure its flawless performance.



Our organization is well known in the market for providing a broad assortment of Brass Cable Gland to our clients. These products are manufactured using quality tested components.



nickel-plated brass, from -40 °C to +100 °C, do not remove or move the gasket; tighten on a flat and smooth surface.



Brass, Double Compressor, Polished.

Copper And Aluminium Lug



Cable Lug, Copper and Aluminium, Welding, Conduct Electricity, Transmission of Electrical Signals, Power



Lugs and Joints, Bimetallic Lugs and Connectors



Copper, 5 Inch



Compression Type, Aluminum Terminal ends, for crimping to XLPE Conductors



Copper, High Temperature Resistance, Round



Silver, copper, silver, Ring Terminal




ILSCO Mechanical Lug, One Conductor, Mechanical connection, Dual Rated, Aluminum material, Tin plated connector, 1 mounting hole(s), mounting bolt/stud size 1/4 in, UL 486A/B Listed, UL 467 Listed, C22.2 No.




Eastern Enterprise manufactures Best quality crocodial terminal available in high quality , made from brass. Buyers from all india can contact


Brass Neutral Link

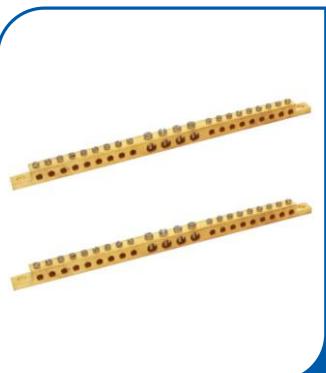

Anchors drop in Anchors
Fasteners Brass Electrical
Accessories Brass Nuts Brass
Pipe Fittings Plumbing Fittings

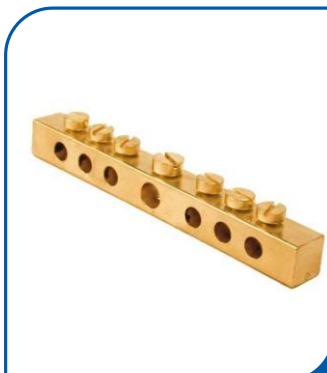

We offer a wide range of Brass HC Neutral Link in various ranges & specifications. Our products are manufactured using high grade materials.

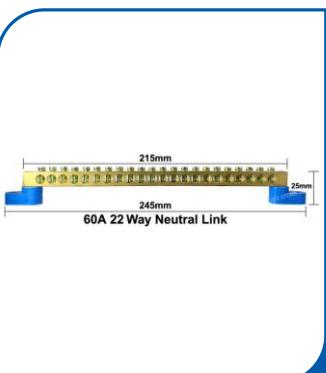

NEUTRAL LINK / NEUTRAL
LINK BAR / SCREW BRASS BAR
(60A) 6WAY, 8WAY, 10WAY,
12WAY, 16WAY, 20WAY, 22WAY



A simple easy to use system of DIN 3 rail mounting ground and neutral bars for panel or box assemblies, colour coded in green (ground) and blue (neutral) to ease identification



A simple easy to use system of DIN 3 rail mounting ground and neutral bars for panel or box assemblies, colour coded in green (ground) and blue (neutral) to ease identification.



12 Hole Neutral Link
500V 110A
25mm Max Cable Size



We are leading manufacturer and supplier of brass 6way neutral links,12ways neutral bar, 18 ways neutral bar,24 ways neutral bars,30 way neutral links, 42 way neutral links,48 ways neutral links,54 ways neutral links, 60 ways neutral links,72 way neutral links,84 ways neutral links,96 ways neutral link, 108 ways neutral link



250-amp stud-only earth/neutral bar - 6xM10 studs with feet
The Australian-manufactured stud-only earth/neutral bar comes with feet.



Supported by a team of highly skilled professionals, we are involved in offering a wide array of Brass Electrical Part that is intricately designed using premium grade raw material and avant-garde technologies in complete tandem with universally accepted norms of quality.



The products we offer are used in varied electric apparatus for enhancing their performance and longevity.



We are engaged in offering a wide and exotic assortment of Brass Temperature Sensor Parts for high temperature sensors. Brass Temperature Sensor Parts that we offer are manufactured following industry norms and standards.



Brass Free Cutting Grade I, Grade II, Grade III
Lead Free, DZR Brass, Copper C101/CW004A
Beryllium Copper, Chromium Copper, Steel
Aluminium, Bronze NES833, CA 104, PB1,
Pb102, Any Other Equivalent Grades



- Free cutting brass IS 319-1 type
- High grade free cutting brass
- Free cutting brass as per BS 249 type.
- Any brass material as per customer Composition & Specification.



Size : 6mm 2 , 10mm 2 , 16mm 2 , 25mm 2 ,
35mm 2 , 50mm 2 , 70mm 2 , 95/100mm2 ,
120mm 2 , 185 mm 2 , 240mm 2 , 300mm 2 ,
400mm 2 .

Material: Brass CDA 360, Copper, Aluminium



Material : Brass
Surface : Polished
Packaging Size : As per customer need
Packaging Type : Packed in Good Quality Box
Size : Multisize
Features : Precisely engineered, Durability, Accurate dimension



Thread Size : 2 mm - 32 mm
Threads : ISO Metric, BSW, BA, BSF, UNC, UNF UNEF
Finish : Brass natural, Electro-Tinned, Nickel
Material : Brass

Brass Earthing & Lightning Protection Accessories



Square Tape Clamp

Conductor Size (MM)

25 x 3
25 x 4
25 x 6
50 x 6



DC Tape Clip

Conductor Size (MM)

25 x 3
25 x 6
40 x 6
50 x 6



Rod To Cable Clamp (U Bolt)

Rod Size	Conductor Size (Mm2)
Inch MM	
5/8" 16	16 - 95
3/4" 20	16 - 70
1" 16	70 - 185
5/8" 20	70 - 150



Oblong Test Clamp

Conductor Size (MM)

25 x 3
40 x 6
50 x 6



Tape Clip

Conductor Size (MM)

20 x 3
25 x 3
50 x 6



Rod To Cable Lug Clamp

Rod Size	
Inch	MM
3/8"	9.5
5/8"	16.0
3/4"	20.0



Coupler

Thread Size : 5/8" & 3/4"
Length (MM) : 50, 60 & 70



Male Bush

Size : 3/4" - 2"
(20MM - 50MM)



Clamp (A Type)

Suitable For Rod
Dia. 12MM

**Rod To Tape Clamp (B Type)**


Road Size Conductor
(Inch) Size (MM)
5/8" 26 x 12
5/8" 40 x 12
5/8" 51 x 12

**Road To Cable Clamp (C Type)**

Size	Conductor	
Inch	MM	Size (Mm2)
3/8"	9.5	35
5/8"	16	50
5/8"	16	70
3/4"	20	95

**Arrestor With Light Duty Base**

Road Dia:	Road Length:
10mm	12"
12mm	18"
15mm	24"
	30"
	36"

**Test Bond**

Conductor Size (MM)
25 x 3
26 x 12

**Heavy Duty Arrestor Base**

Conductor Size (MM)
40 x 6
50 x 6

**Heavy Duty Cable Saddle**

Rod Size
Inch MM
3/8" 9.5
5/8" 16.0
3/4" 20.0

**Ridge Saddle****Tee Clamp****Rod To Tape Coupling**

Threaded Copperbonded Ground Rod



Two Ends Thread



**Two Ends Thread With
One End Tip**



**One End Thread And One End
Tipped**



Office Australia :

- +61 431 444 959 / +61 480 128 584
- sales_aus@apexmetalsworldwide.com
- 8 Bells avenue, Kalkallo,
Victoria, 3064. Australia.

Office Germany :

- +49 (0)159 06485285
- info@apexmetalsworldwide.com
- Lilistr 34, 63067, Offenbach
am Main (Germany).

Office UK :

- +44 07424505681
- info@apexmetalsworldwide.com
- 25c Ranelagh Road, Wembley,
London, HA0 4TW

Head Office India :

- +91 93744 37771 / +91 87587 49121
- info@apexmetalsworldwide.com
- apexmetals4634@gmail.com
- Plot No, 4634, GIDC Phase III,
Jamnagar, Gujarat 361004.