

Your Vision, Our Expertise

PRODUCT CATALOUGE 2024

Cable Gland





Backed with huge industry experience and market understanding, we are involved in manufacturing a wide variety of Brass A1 A2 Cable Glands for our valued patrons.



We specialize in manufacturing safe, leak proof, flameproof and explosion proof glands to avoid all mishaps & prevent any hazards to the health & property.



CW 2 Part and 3 part and 4 part



MS Copper Bonded



It is designed using optimum quality brass material and using modern technology to ensure its flawless performance.



Our organization is well known in the market for providing a broad assortment of Brass Cable Gland to our clients. These products are manufactured using quality tested components.



nickel-plated brass, from -40 °C to +100 °C, do not remove or move the gasket; tighten on a flat and smooth surface.



Brass, Double Compressor, Polished.

Copper And Aluminium Lug





Cable Lug, Copper and Aluminium, Welding, Conduct Electricity, Transmission of Electrical Signals, Power



Lugs and Joints, Bimetallic Lugs and Connectors



Copper, 5 Inch



Compression Type, Aluminum Terminal ends, for crimping to XLPE Conductors



Copper, High Temperature Resistance, Round



Silver, copper, silver, Ring Terminal



ILSCO Mechanical Lug, One Conductor, Mechanical connection, Dual Rated, Aluminum material, Tin plated connector,1 mounting hole(s), mounting bolt/stud size 1/4 in, UL 486A/B Listed, UL 467 Listed, C22.2 No.



Eastrern Enterprise manufactures
Best quality crocodial terminal
available in high quality , made
from brass. Buyers from all india
can contact

Brass Neutral Link






Anchors drop in Anchors FastenersBrass Electrical Accessories Brass Nuts Brass Pipe Fittings Plumbing Fittings



We offer a wide range of Brass HC Neutral Link in various ranges & specifications. Our products are manufactured using high grade materials.



NEUTRAL LINK / NEUTRAL LINK BAR / SCREW BRASS BAR (60A) 6WAY, 8WAY, 10WAY, 12WAY, 16WAY, 20WAY, 22WAY



A simple easy to use system of DIN 3 rail mounting ground and neutral bars for panel or box assemblies, colour coded in green (ground) and blue (neutral) to ease identification



A simple easy to use system of DIN 3 rail mounting ground and neutral bars for panel or box assemblies, colour coded in green (ground) and blue (neutral) to ease identification.



12 Hole Neutral Link 500V 110A 25mm Max Cable Size



We are leading manufacturer and supplier of brass 6way neutral links,12ways neutral bar, 18 ways neutral bar,24 ways neutral bars,30 way neutral links, 42 way neutral inks,48 ways neutral links,54 ways neutral links,60 ways neutral links,72 way neutral likns,84 ways neutral links,96 ways neutral link, 108 ways neutral link



250-amp stud-only earth/neutral bar - 6xM10 studs with feet The Australian-manufactured stud-only earth/neutral bar comes with feet.

Brass Electrical Parts





Supported by a team of highly skilled professionals, we are involved in offering a wide array of Brass Electrical Part that is intricately designed using premium grade raw material and avant-garde technologies in complete tandem with universally accepted norms of quality.



The products we offer are used in varied electric apparatus for enhancing their performanc and longevity.



We are engaged in offering a wide and exotic assortment of Brass Temperature Sensor Parts for high temperature sensors. Brass Temperature Sensor Parts that we offer are manufactured following industry norms and standards.



Brass Free Cutting Grade I, Grade II, Grade III Lead Free, DZR Brass, Copper C101/CW004A Beryllium Copper, Chromium Copper, Steel Aluminium, Bronze NES833, CA 104, PB1, Pb102, Any Other Equivalent Grades



Free cutting brass IS 319-1 type

- High grade free cutting brass

-Free cutting brass as per BS 249 type. -Any brass material as per customer

Composition & Specification.



Size: 6mm 2, 10mm 2, 16mm 2, 25mm 2, 35mm 2 ,50mm 2 , 70mm 2 , 95/100mm2, 120mm 2 , 185 mm 2 , 240mm 2 , 300mm 2

Material: Brass CDA 360, Copper, Aluminium



Material : Brass

Surface : Polished

Packaging Size : As per customer need Packaging Type: Packed in Good Quality

Size: Multisize

Features: Precisely engineered, Durability, Accurate dimension



Thread Size : 2 mm - 32 mm Threads: ISO Metric, BSW, BA, BSF, UNC,

Finish: Brass natural, Electro-Tinned, Nickel Material: Brass

Brass Earthing & Lightning Protection Accessories





Square Tape Clamp

Conductor Size (MM)

25 x 3

25 x 4

25 x 6

50 x 6



DC Tape Clip

Conductor Size (MM)

25 x 3

25 x 6

40 x 6

50 x 6



Rod To Cable Clamp (U Bolt)

Rod Size Conductor

Inch MM Size (Mm2)

5/8" 16 16 - 95

3/4" 20 16 - 70

1" 16 70 - 185

5/8" 20 70 - 150



Oblong Test Clamp

Conductor Size (MM)

25 x 3

40 x 6

50 x 6



Tape Clip

Conductor Size (MM)

20 x 3

25 x 3

50 x 6



Rod To Cable Lug Clamp

Rod Size

Inch MM

3/8" 9.5

5/8" 16.0

3/4" 20.0



Coupler

Thread Size: 5/8" & 3/4" Lengh (MM): 50, 60 & 70



Male Bush

Size: 3/4" - 2"

(20MM - 50MM)



Clamp (A Type

Suitable For Rod Dia. 12MM

Brass Earthing & Lightning **Protection Accessories**





Rod To Tape Clamp (B Type)

Road Size Conductor Size (MM) (Inch) 5/8" 26 x 12 5/8" 40 x 12 5/8" 51 x 12



Road To Cable Clamp (C Type)

Conductor Size Inch MM Size (Mm2) 3/8" 35 9.5 5/8" 16 50 70 5/8" 16

20

95



Arrestor With Light Duty Base

Road Length: Road Dia: 10mm 12"

18" 12mm 24" 15_{mm} 30" 36"



Test Bond

Conductor Size (MM)

25 x 3 26 x 12



Heavy Duty Arrestor Base

Conductor Size (MM)

40 x 6

3/4"

50 x 6



Heavy Duty Cable Saddle

Rod Size

Inch MM

3/8" 9.5

5/8" 16.0

3/4" 20.0








Threaded Copperbonded Ground Rod



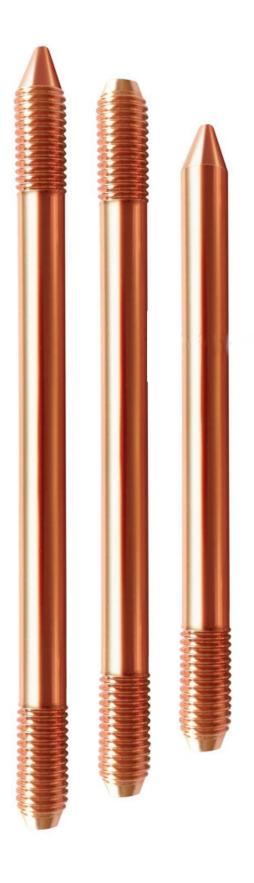









Office Australia:

- +61 431 444 959 / +61 480 128 584
- sales_aus@apexmetalsworldwide.com
- 8 Bells avenue, Kalkallo, Victoria, 3064. Australia.

Office Germany:

- +49 (0)159 06485285
- sales@apexmetalsworldwide.com
- Lilistr 34, 63067, Offenbach am Main (Germany).

Head Office India:

- +91 93744 37771 / +91 87587 49121
- info@apexmetalsworldwide.com
- apexmetals4634@gmail.com
- Plot No, 4634, GIDC Phase III, Jamnagar, Gujarat 361004.



